

## Burmateak


**Burmateak** has been developed through the continued efforts to create the most authentic teak wood touch and aesthetics experience. The custom, two tone finished effect provides a natural wood grain look that certainly leaves **Burmateak** in a class of its own as a wood teak alternative. Combining this unique aesthetic with the top performances proprieties of a top PUR coating, it provides an industry leading solution for outdoor deck coverings needs. Suited for open decks or indoor areas, **Burmateak** is available in a variety of colors that can be combined with black, white, or custom colored caulking.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1,35 kg/dm <sup>3</sup>	■	■



**api**  
L.go Donegani 2 | 20121 Milano | Italia  
marine@apiresinfloors.com | [www.apiresinfloors.com](http://www.apiresinfloors.com)




 Soggetta a controllo e coordinamento di RPM Int. inc.  
Subject to management and coordination by RPM Int. Inc.

**api HQ**  
via Trieste 13  
16018 Mignanego  
Genova, Italy  
t +39 010 772 0751

**api asia**  
Shenshang  
Mansion 1121  
Changyuan road no. 80  
Nantong econ. dev.,  
area Jiangsu, China

**api usa**  
1794 NW 82nd Ave  
Doral (Miami)  
FL 33126

**api**

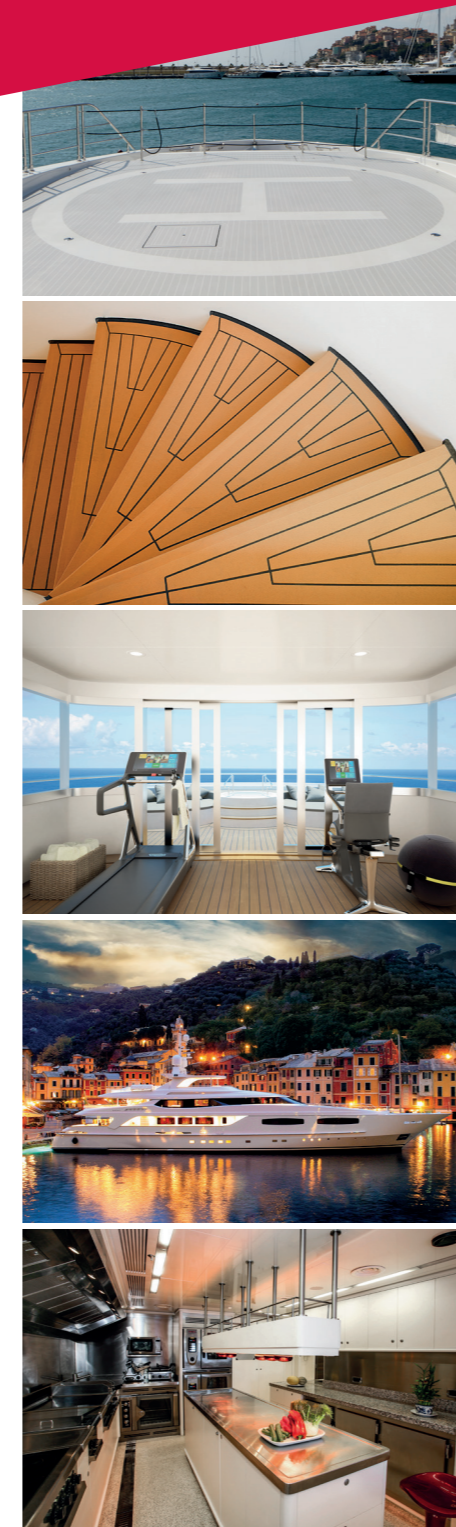

# deck coverings and resin flooring


marine topcoats  
yacht & superyachts

**A global company for a global market.**

3 production units, 4 sales offices and over 300 people between production, headquarters and field technicians working every day on new building, drydock or in service project, API is a global company structured to service seagoing cruise, yacht, ferry and commercial vessels in any location around the world.

**api**



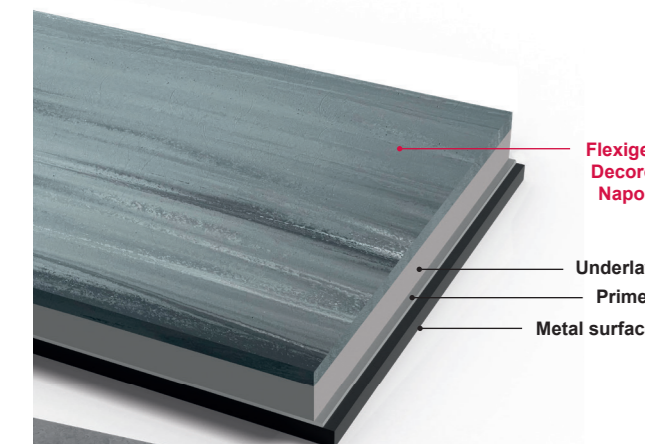


Flexigel Decoro Napoli  
Underlay Primer  
Metal surface

## Flexigel Decoro Napoli

**Flexigel Decoro Napoli** is a unidirectional, multi-color blend of the Flexigel decorative topcoat. Original colors keep their vibrance over time, even in the most aggressive UV environments. **Flexigel Decoro Napoli** is a long-term solution due to its low weight, high flexibility, water resistant and anticorrosion characteristics. API can produce unique and highly customizable colors and designs for both indoor and outdoor applications, including pools and other wet areas.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.35 kg/dm <sup>3</sup>	■	■

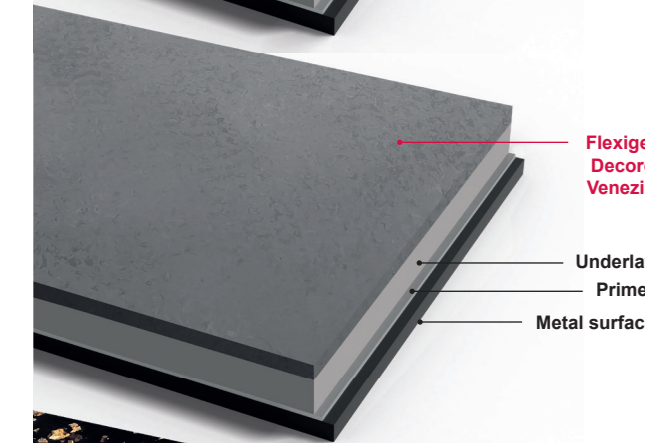


Flexigel Decoro Venezia  
Underlay Primer  
Metal surface

## Flexigel Decoro Venezia

**Flexigel Decoro Venezia** is multi-color, natural flowing pattern design PUR decorative topcoat. Original colors keep their vibrance over time, even in the most aggressive UV environments. **Flexigel Decoro Venezia** is a long-term solution due to its low weight, high flexibility, water resistant and anticorrosion characteristics. API can produce unique and highly customizable colors and designs for both indoor and outdoor applications, including pools and other wet areas.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.35 kg/dm <sup>3</sup>	■	■

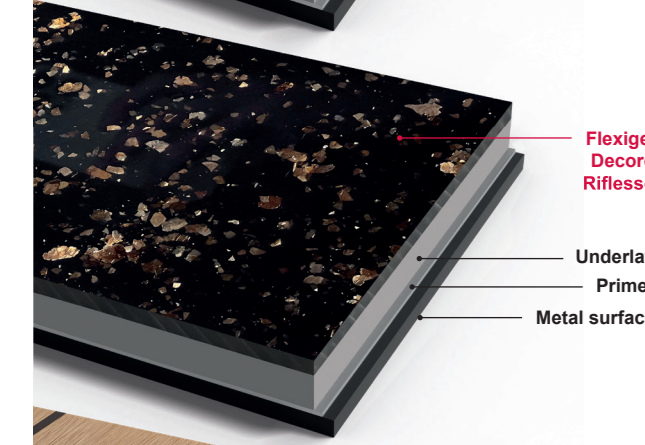


Flexigel Decoro Riflesso  
Underlay Primer  
Metal surface

## Flexigel Decoro Riflesso

**Flexigel Decoro Riflesso** is a unique topcoat solution for indoor entertainment areas such as casinos, ballrooms, theaters, dining rooms, and upscale spaces. Combining thick, flexible, transparent resin with specifically colored flakes creates a unique mired effect that will set any space apart from the others. A variety of flake colors, sizes, and densities can be chosen to produce a desired look. **Flexigel Decoro Riflesso** is UV stable, eliminating the development of yellowing over time.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.00 kg/dm <sup>3</sup>	■	

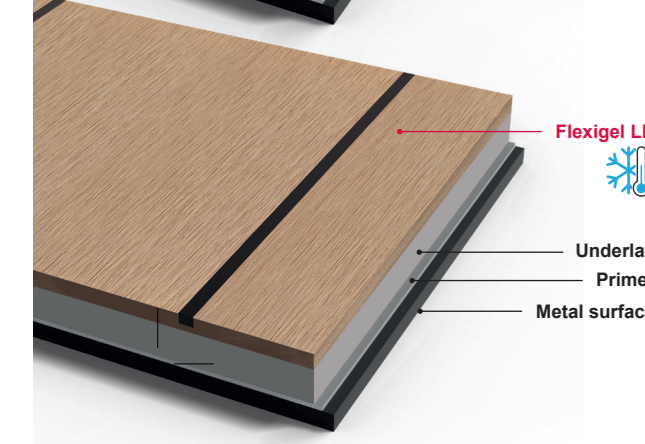


Flexigel LH  
Underlay Primer  
Metal surface


## Flexigel LH

**Flexigel LH** is the latest generation of API resin floor coverings that significantly reduces the absorption of heat across a decks surface. Offering an ideal comfort level for any on-board area where direct skin contact with the deck is most frequent. **Flexigel LH** can be utilized for on open decks as well as precast resin elements like benches or steps.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.35 kg/dm <sup>3</sup>		■

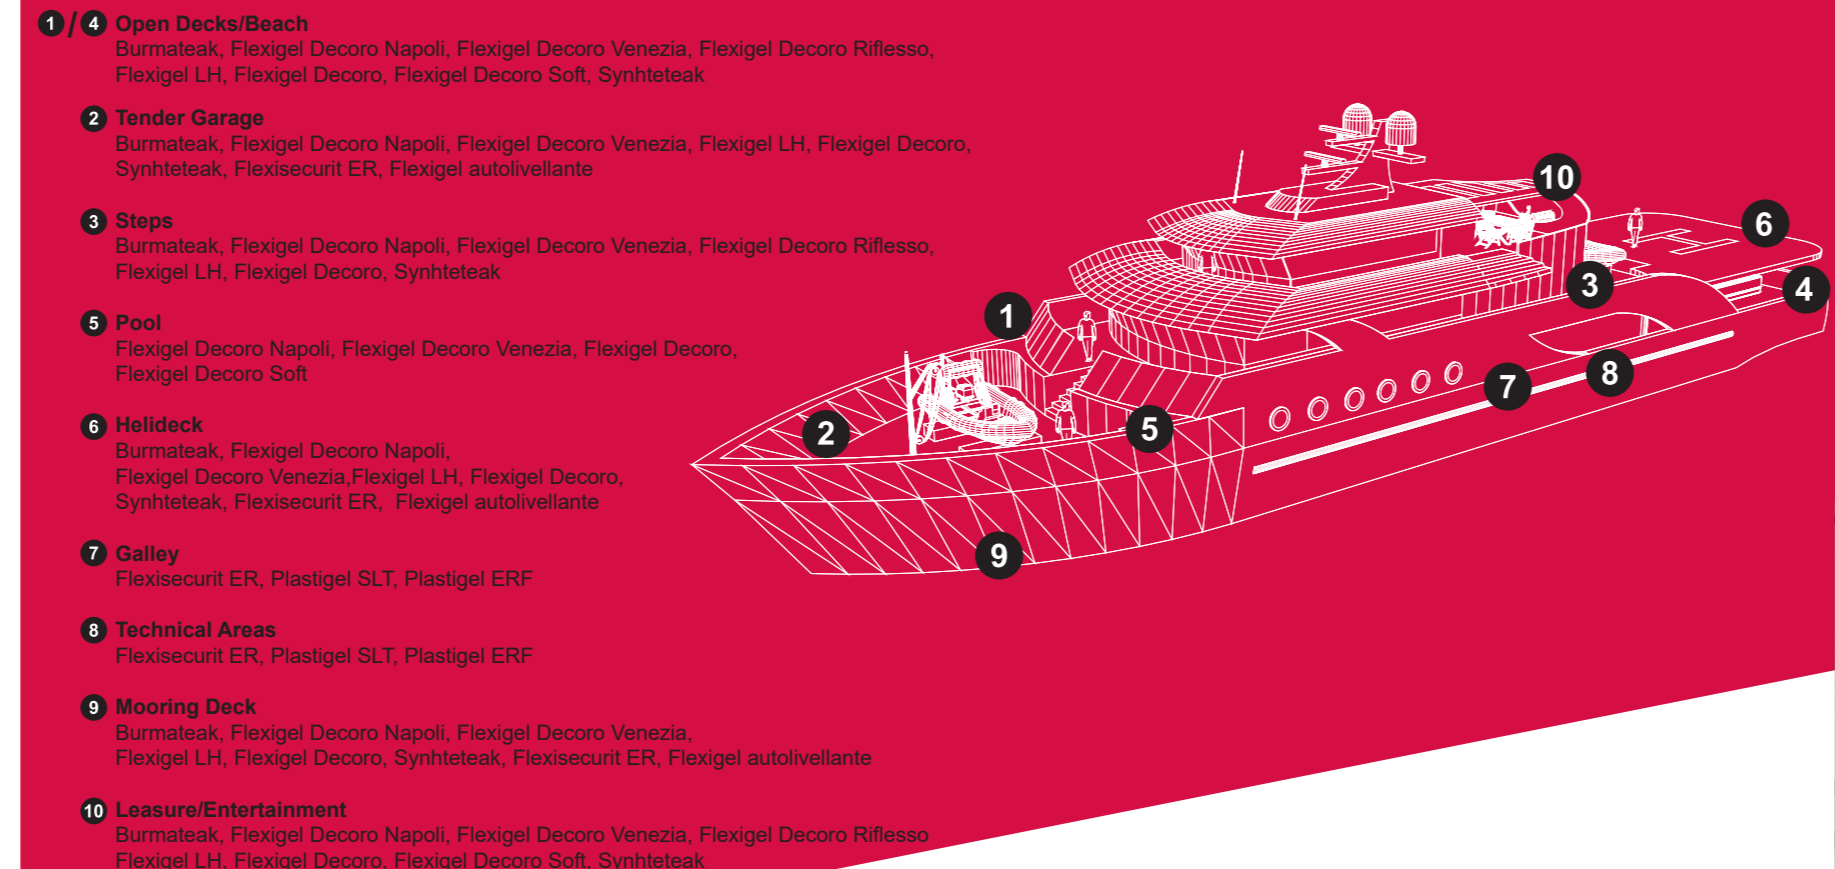

- 1 Open Decks/Beach**  
Burmateak, Flexigel Decoro Napoli, Flexigel Decoro Venezia, Flexigel Decoro Riflesso, Flexigel LH, Flexigel Decoro, Flexigel Decoro Soft, Synhteteak
- 2 Tender Garage**  
Burmateak, Flexigel Decoro Napoli, Flexigel Decoro Venezia, Flexigel LH, Flexigel Decoro, Synhteteak, Flexisecurit ER, Flexigel autolivellante
- 3 Steps**  
Burmateak, Flexigel Decoro Napoli, Flexigel Decoro Venezia, Flexigel Decoro Riflesso, Flexigel LH, Flexigel Decoro, Synhteteak
- 4**
- 5 Pool**  
Flexigel Decoro Napoli, Flexigel Decoro Venezia, Flexigel Decoro, Flexigel Decoro Soft
- 6 Halideck**  
Burmateak, Flexigel Decoro Napoli, Flexigel Decoro Venezia, Flexigel LH, Flexigel Decoro, Synhteteak, Flexisecurit ER, Flexigel autolivellante
- 7 Galley**  
Flexisecurit ER, Plastigel SLT, Plastigel ERF
- 8 Technical Areas**  
Flexisecurit ER, Plastigel SLT, Plastigel ERF
- 9 Mooring Deck**  
Burmateak, Flexigel Decoro Napoli, Flexigel Decoro Venezia, Flexigel LH, Flexigel Decoro, Synhteteak, Flexisecurit ER, Flexigel autolivellante
- 10 Leisure/Entertainment**  
Burmateak, Flexigel Decoro Napoli, Flexigel Decoro Venezia, Flexigel Decoro Riflesso, Flexigel LH, Flexigel Decoro, Flexigel Decoro Soft, Synhteteak

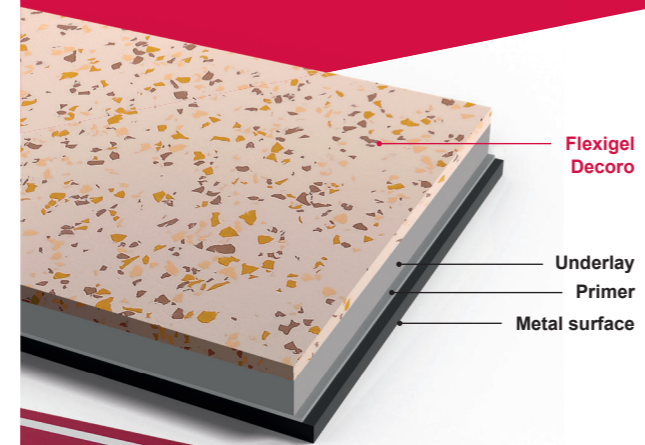


Flexigel Decoro  
Underlay Primer  
Metal surface

## Flexigel Decoro

**Flexigel Decoro** has been applied to a large segment of the passenger ships sailing worldwide, making it API's most versatile, well-known resin flooring. Several characteristics contribute to its popularity. First, colors keep their original vibrance over time, even in the most aggressive UV environments. Second, **Flexigel Decoro** is a long-term solution due to its low weight, high flexibility, water resistant and anticorrosion characteristics. Lastly, API can produce unique and highly customizable colors and designs, including the integration of EPDM granules, as well as *Synhteteak* and *Burmateak* finishes.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.35 kg/dm <sup>3</sup>	■	■

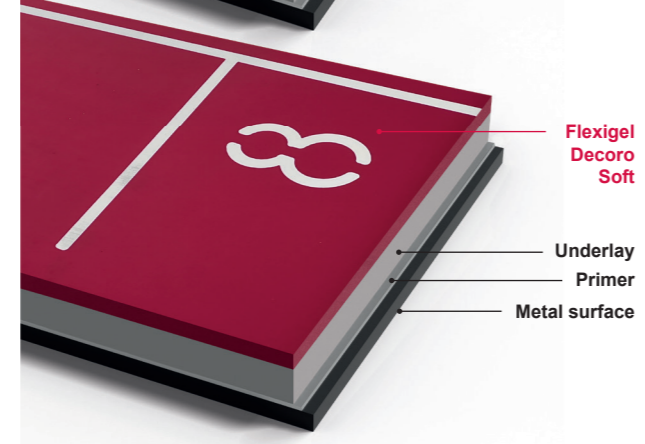


Flexigel Decoro Soft  
Underlay Primer  
Metal surface

## Flexigel Decoro Soft

**Flexigel Decoro Soft** inherently offers the same benefits as standard *Flexigel Decoro*, while providing increased shock absorption and a softer touchpoint. Similarly, API can produce unique and highly customizable colors and designs, including the integration of EPDM granules. When combined with high-thickness and high-elasticity underlays, **Flexigel Decoro Soft** is a great solution for sport and play areas. This combination also makes it suitable for acoustically sensitive areas, offering a significant sound damping effect.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.3 kg/dm <sup>3</sup>	■	■

API is a leading producer and installer of resin flooring for the marine industry and since 2011 is part of RPM Internation Inc family, which is known internationally for its reliability and competence. Over the years, the company has developed close relationships with leading domestic and international shipowners, promoting the 'Resin' and 'Made in Italy' culture worldwide. Since 1958 API has always focused on the quality of its materials, developing IMO certified products and systems according to top safety requirements both for the environment and user during installation. The R&D team has developed over the year solutions with a high aesthetic and decorative value, making API the reference in the market.

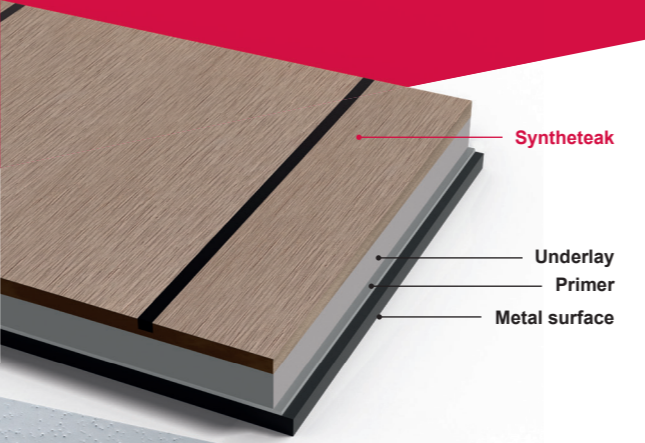


Synhteteak  
Underlay Primer  
Metal surface

## Synhteteak

Flexible, highly resilient and environmentally friendly, **Synhteteak** is a wood-like decorative topcoat designed to give a real teak look and feel. The wood grain like surface profile gives **Synhteteak** excellent non-slip performance, while its chemical properties offer long term durability. Both its waterproof and UV resistance ensure easy maintenance and fast cleanability. Ideally suited for open decks, **Synhteteak** is available in a variety of colors that can be combined with black, white, or custom colored caulking.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.35 kg/dm <sup>3</sup>	■	■

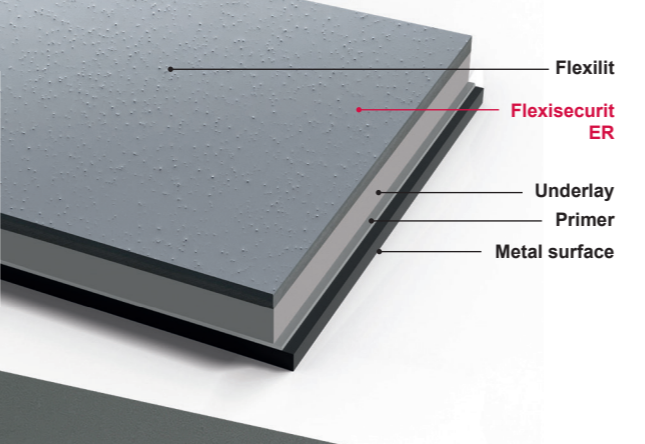


Flexilitt  
Flexisecurit ER  
Underlay Primer  
Metal surface

## Flexisecurit ER

**Flexisecurit ER** has been installed on cruise ships, offshore ferries, cargo vessels, workboats, as well as Navy vessels around the world. Designed for technical and heavy-duty areas, **Flexisecurit ER** is one of API's indoor floor solutions that are essential when anti-slip, water resistance, mechanical resilience and maintenance needs are the key factors at play. **Flexisecurit ER** can be used for onboard workshops, crew stairways, pantries, storerooms, and wet units, as well as waste management, food storage, and catering areas where vinyl and carpet have a short lifespan.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.80 kg/dm <sup>3</sup>	■	

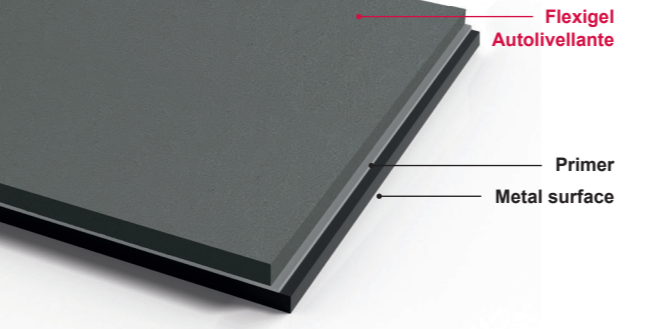


Flexigel Autolivellante  
Primer  
Metal surface

## Flexigel Autolivellante

**Flexigel Autolivellante** is a highly-resistant, flexible, high-thickness, self-levelling polyurethane-based resin coating. Suitable for working and heavy-duty areas, **Flexigel Autolivellante** can be applied as both an underlay and a protective topcoat depending on the ship's needs. Available in several different colors.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.56 kg/dm <sup>3</sup>	■	■

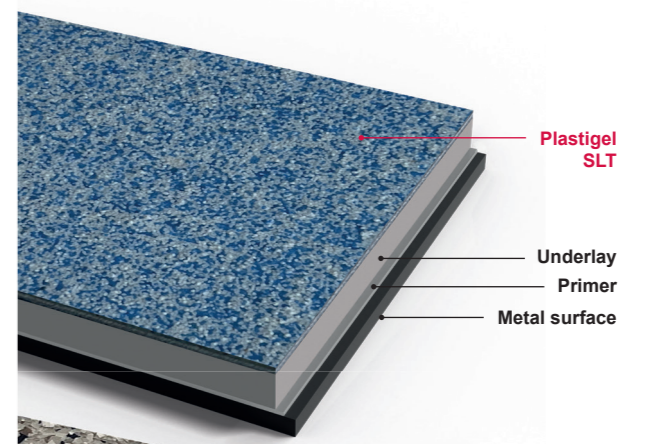


Plastigel SLT  
Underlay Primer  
Metal surface

## Plastigel SLT

**Plastigel SLT** is a non-slip, easy-to-clean, highly resistant, epoxy-based system designed for heavy duty interior areas. Although technical, this system integrates multicolor quartz that provides both slip resistance as well as a decorative finish. Available in 15 colors, with the ability create coving as well as vertical coverage.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	about 2.10-2.30 kg/dm <sup>3</sup>	■	

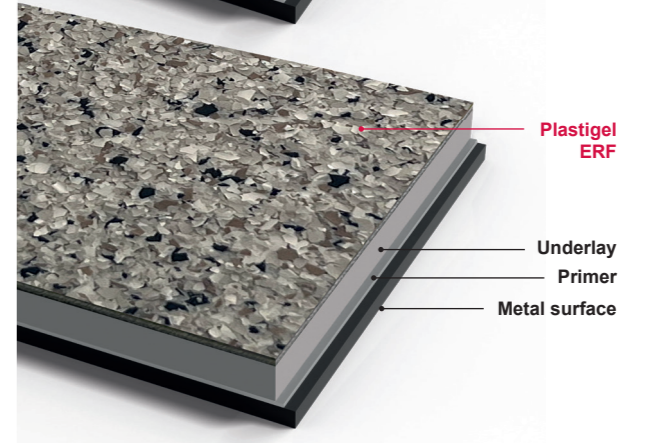

Plastigel ERF  
Underlay Primer  
Metal surface

## Plastigel ERF

**Plastigel ERF** is a highly resistant, easy-to-clean, epoxy-based system designed for heavy-duty interior areas. Decorative effects can be achieved with a variety of vinyl flakes that are encapsulated within the clear resin topcoat. The addition of anti-slip granules increases the slip resistance of **Plastigel ERF**.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	about 1.10-1.30 kg/dm <sup>3</sup>	■	

