


Why use
API UNDERLAYS
and save weight?

**500 M²
HELIDECK**

Case Study

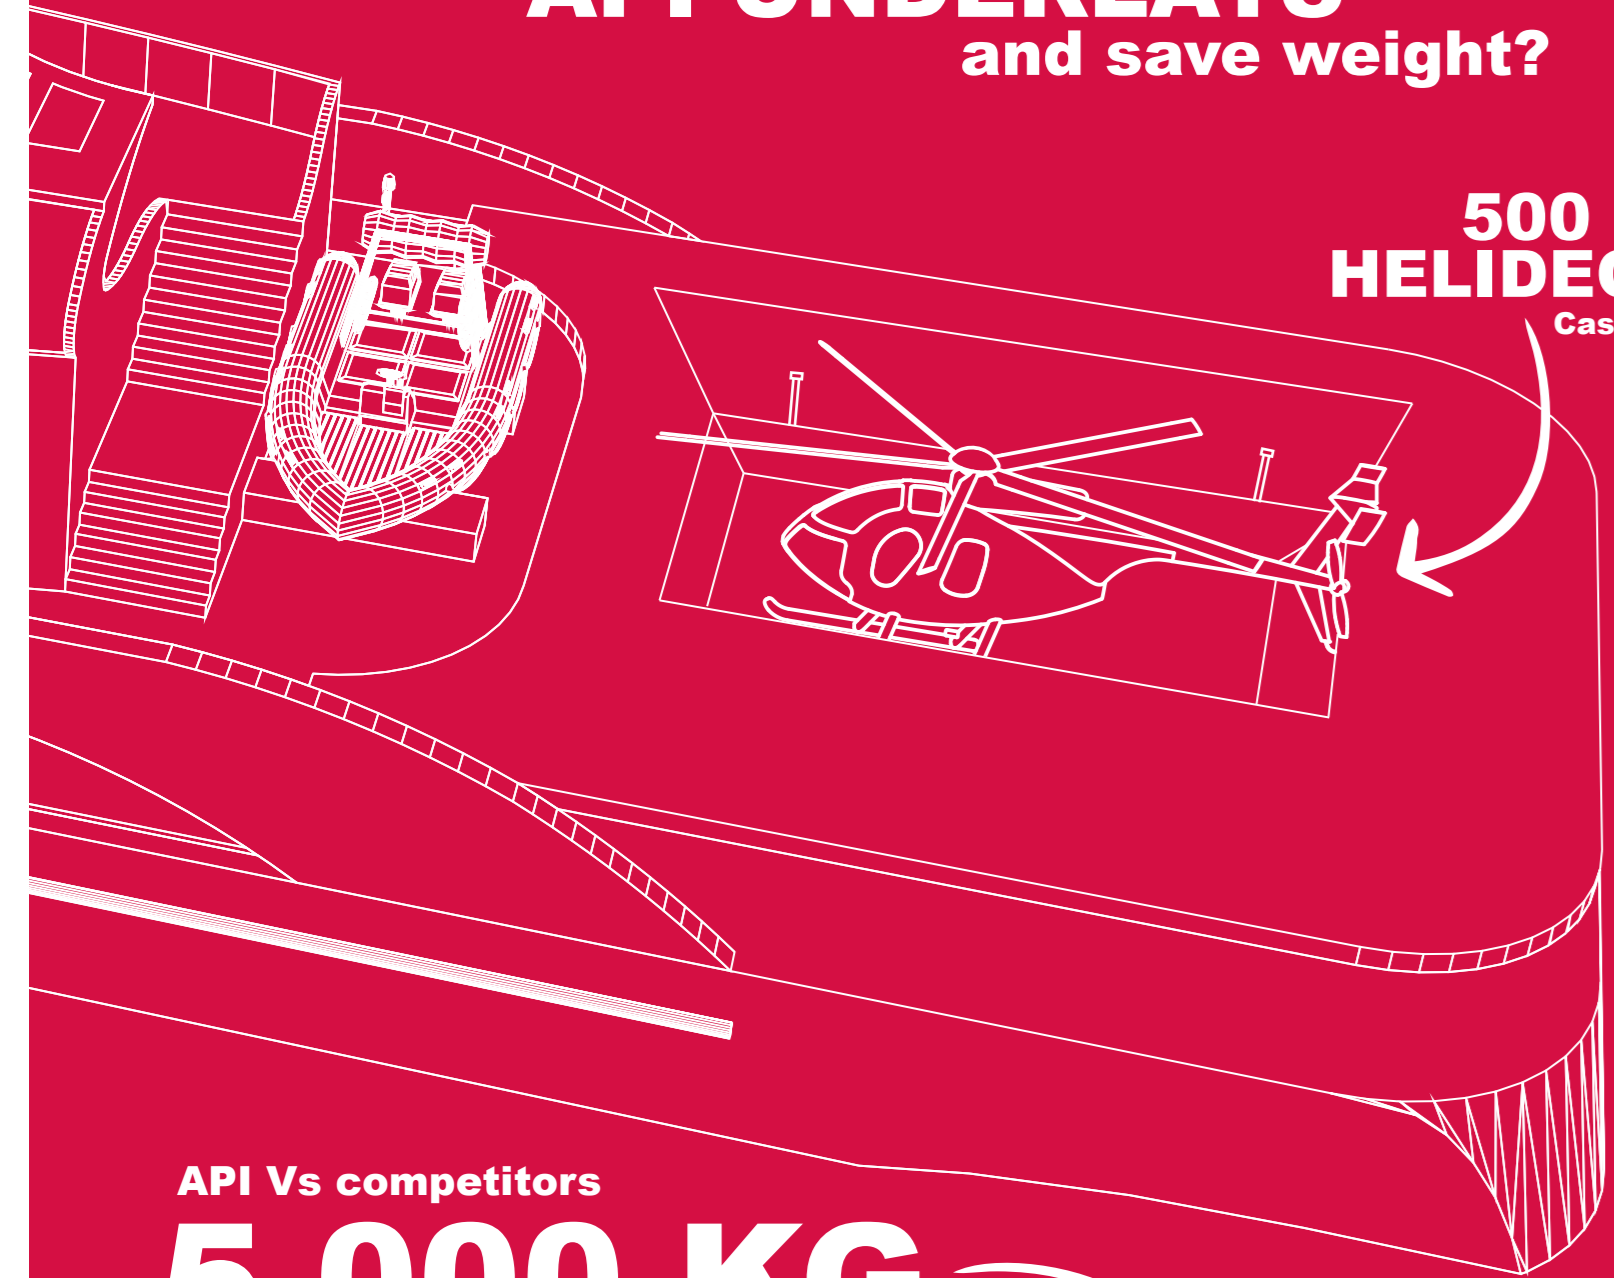

API Vs competitors


5.000 KG
WEIGHT SAVING

Equivalent to storing
a **HELICOPTER** on board

api


deck
coverings
and resin
flooring

marine underlays
yacht & superyachts

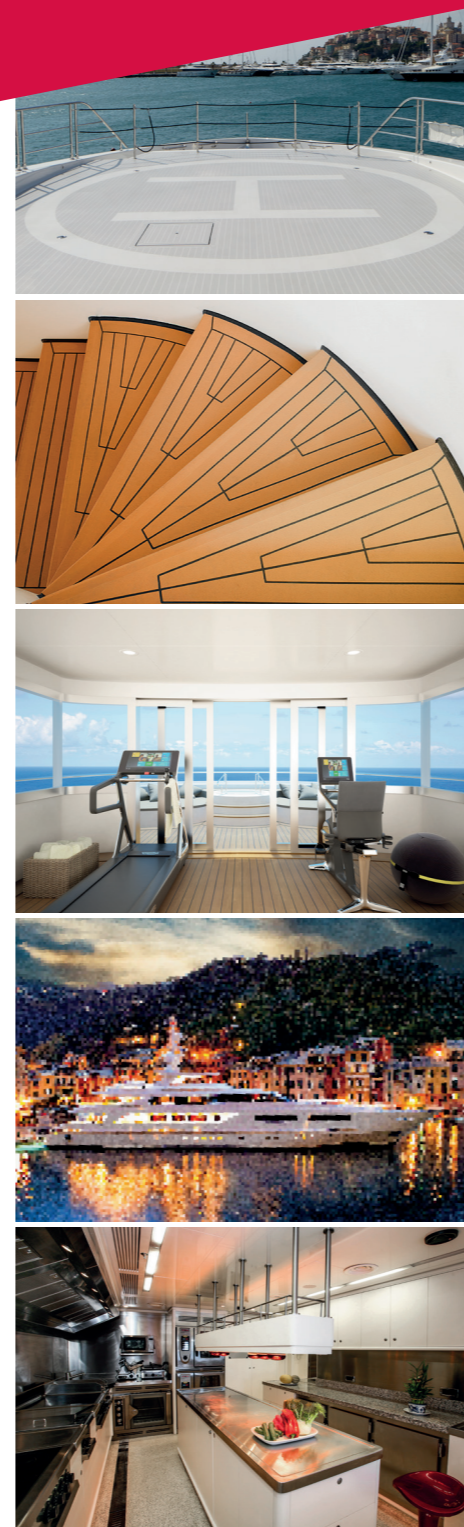

api
L.go Donegani 2 | 20121 Milano | Italia
marine@apiesinfloors.com | www.apiesinfloors.com



 Soggetta a controllo e coordinamento di RPM Int. inc.
Subject to management and coordination by RPM Int. Inc.

api HQ
via Trieste 13
16018 Mignanego
Genova, Italy
t +39 010 772 0751

api asia
Shenshang
Mansion 1121
Changyuan road no. 80
Nantong econ. dev.,
area Jiangsu, China


api usa
1794 NW 82nd Ave
Doral (Miami)
FL 33126

A global company for a global market.

3 production units, 4 sales offices and over 300 people between production, headquarters and field technicians working every day on new building, drydock or in service project, API is a global company structured to service seagoing cruise, yacht, ferry and commercial vessels in any location around the world.

api




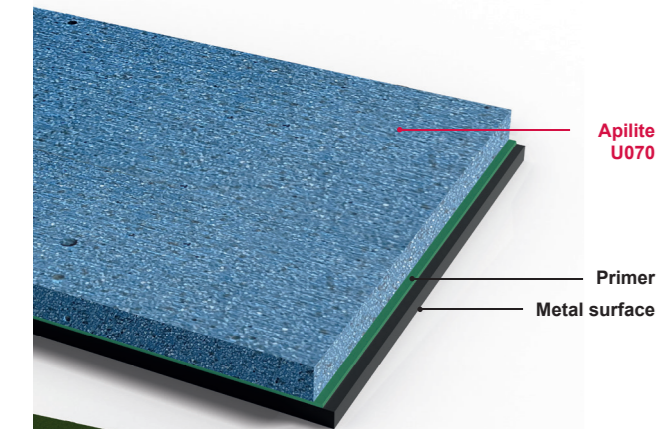

Apilite U070

Apilite U070 is a low specific weight underlay, based on tri-component epoxy resins. It protects metallic surfaces from deterioration through great adhesion to the ship substrate: it can be applied alone immediately after surface preparation, making it an ideal underlay when installation times are a concern. Ideal for heavy-duty areas painted with Flexilit and/or as an underlay for epoxy floor systems.


CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	0.70 kg/dm ³	■	

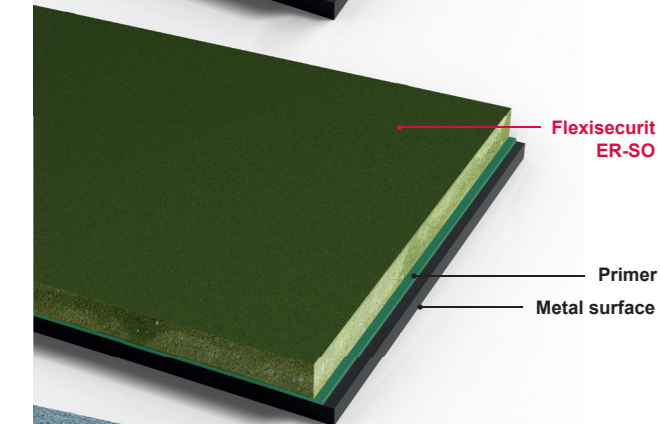

Flexisecurit ER-SO

Flexisecurit ER-SO is a three-component epoxy flooring system derived from naval experience, with high resistance to mechanical stress. It is mainly used in all indoor areas where the floor is subject to heavy-duty use. Nevertheless, being a marine underlay, it remains constantly flexible. It can be applied directly on steel after suitable floor preparation, without primer. It is without doubt one of the best referenced epoxy underlays in the marine and naval industry.


CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	2.10 kg/dm ³	■	

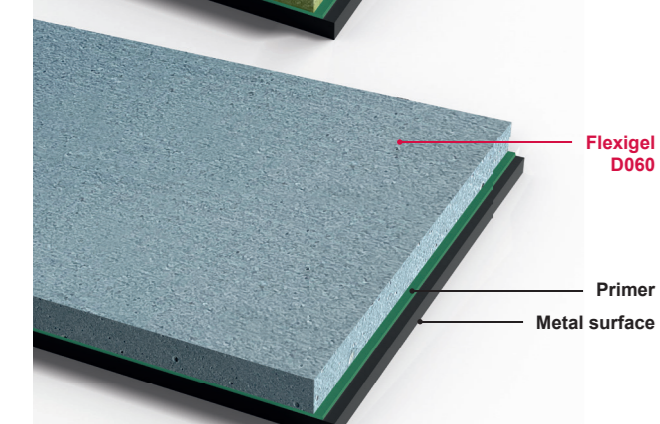

Flexigel D060

Flexigel D060 is a very light underlay with an average specific weight of 0.60 kg/dm³. Very flexible at all thicknesses and IMO-certified for application in thicknesses up to 15 mm. **Flexigel D060** is one of the products in most demand within the yacht industry and mandatory for all projects where reduced weight is essential. **Flexigel D060** has also been formulated for highly cambered decks, is easy to sand and can be applied at full thickness in a single step.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	0.60 kg/dm ³	■	■


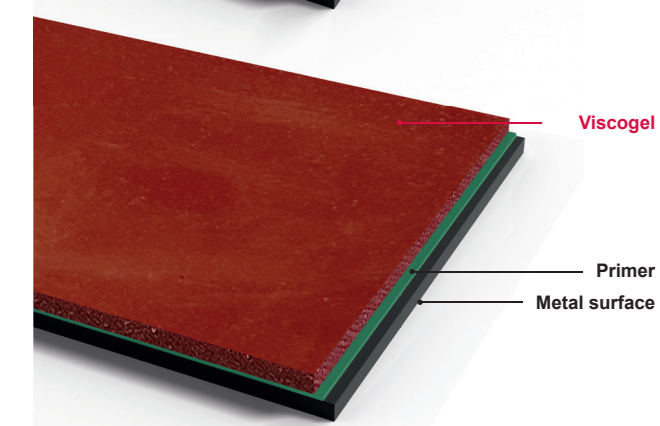


Viscogel

Viscogel is a primary deck covering for sound damping. Its main purpose is to reduce structural vibration significantly due to its permanent viscoelastic characteristics. It is normally topped by a levelling compound (mainly *Flexigel Alleggerito* or *Flexiplast HW*) to achieve the required thickness and the necessary levelling.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.30 kg/dm ³	■	■


- Open Decks**
Flexigel D060, Flexigel Light, Flexigel Sound, Flexigel Alleggerito LT, Flexigel MS070, Flexigel M60
- Teak Underlay**
Flexigel D060, Flexigel Light, Flexigel Alleggerito LT, Flexigel MS070
- Heavy duty technical areas**
Apilite U070, Flexisecurit ER-SO, Flexiplast HT, Flexiplast LT, Flexiplast HW, Plastigel GSI
- Indoor Wet Areas**
Apilite U070, Flexisecurit ER-SO, Flexiplast HT, Flexiplast LT, Flexiplast HW, Plastigel GSI
- Outdoor wet areas**
Flexigel Light, Flexigel Sound, Flexigel Alleggerito LT, Flexigel MS070, Flexigel M60
- Sound Dampening**
Viscogel, Flexigel Sound, Flexigel Damping, Flexigel M60

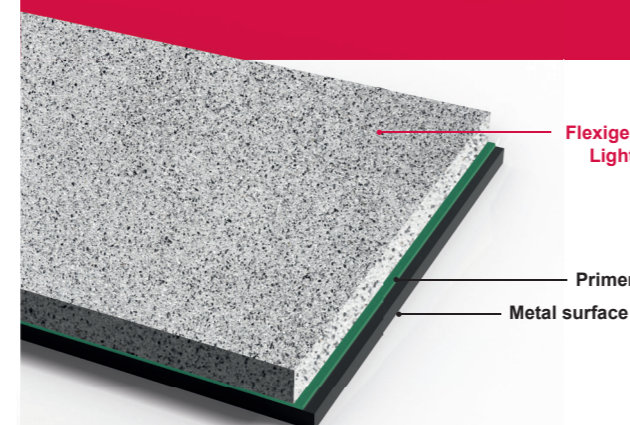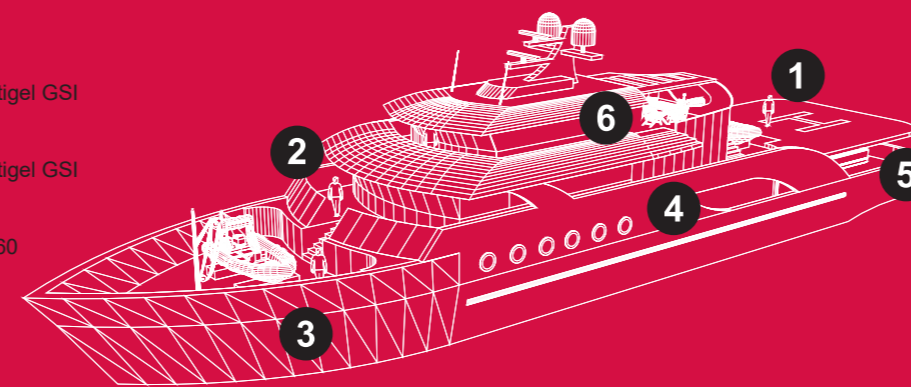

Flexigel Light

Flexigel Light is based on tri-component aliphatic polyurethane resins. It is a low specific weight underlay used for flexible, thick and waterproof protective coverings. It can be applied both on *Flexigel Primer Per Metalli* and on *Primer Green*, for a perfect adhesion on metallic surfaces. Suitable for open decks and interiors areas.


CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	0.70 kg/dm ³	■	■

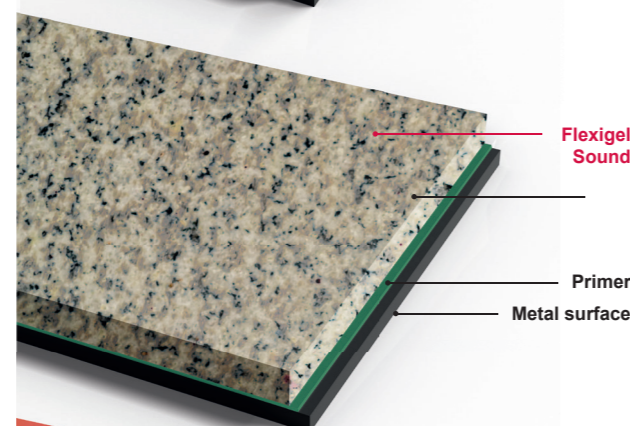

Flexigel Sound

Flexigel Sound is a highly elastic and flexible underlay based on aliphatic polyurethane resin. Its great viscoelastic and impact-noise reduction properties allow the surface to soften sound waves and vibrations. Generally used on all areas with specific acoustic requirements or where high-elasticity flooring is preferred, such as sport areas and jogging tracks.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.20 kg/dm ³	■	■

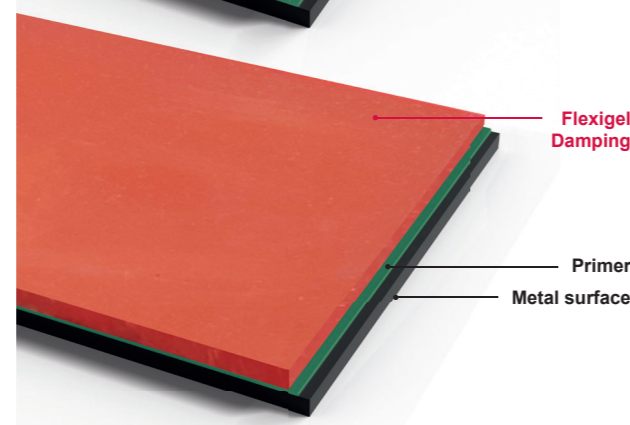


Flexigel Damping

Flexigel Damping is an aliphatic primary deck covering for sound damping. Its main purpose is to significantly reduce structural vibration due to its permanent viscoelastic characteristics. It is used jointly with steel plates or covering by a levelling compound (mainly *Flexigel Alleggerito LT* or *Flexiplast HW*) to achieve the required thickness and the necessary levelling.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.20 kg/dm ³	■	■


API is a leading producer and installer of resin flooring for the marine industry and since 2011 is part of RPM International Inc family, which is known internationally for its reliability and competence. Over the years, the company has developed close relationships with leading domestic and international shipowners, promoting the 'Resin' and 'Made in Italy' culture worldwide. Since 1958 API has always focused on the quality of its materials, developing IMO certified products and systems according to top safety requirements both for the environment and user during installation. The R&D team has developed over the year solutions with a high aesthetic and decorative value, making API the reference in the market.

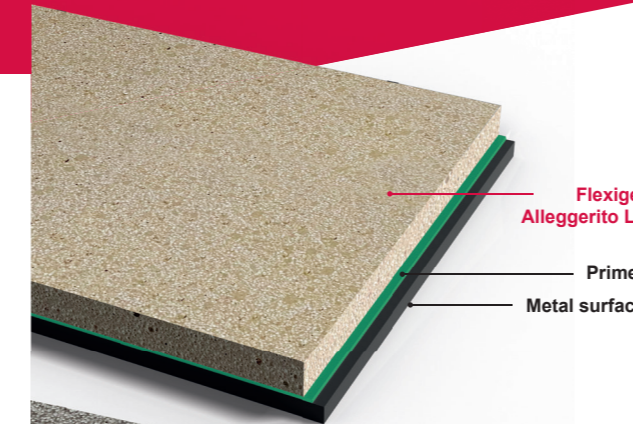

Flexigel Alleggerito LT

Flexigel Alleggerito LT is one of the most widely used resin underlays in the marine industry. Made of two component polyurethane resin and selected aggregates, **Flexigel Alleggerito LT** offers an excellent compromise between elasticity, viscoelastic properties and resiliency. It can be applied in a single layer to full thickness. Curing time can be adjusted according to temperature. It can be sanded to receive finishing flooring materials, most commonly resin topcoats.


CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	0.90 kg/dm ³	■	■

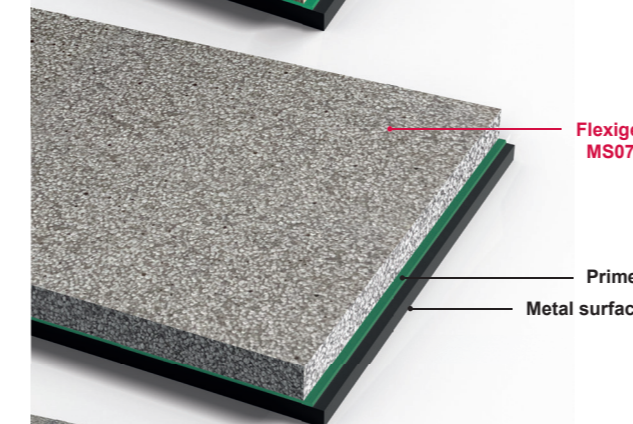

Flexigel MS070

Flexigel MS070 is a low specific weight underlay, based on tri-component polyurethane resins, making it the perfect underlay for Flexigel application system. **Flexigel MS070** helps protect the steel surfaces thanks to its flexibility and resiliency, working as an optimal underlay for decorative topcoats. Suitable for open decks and interior decorative coverings.


CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	0.70 kg/dm ³	■	■

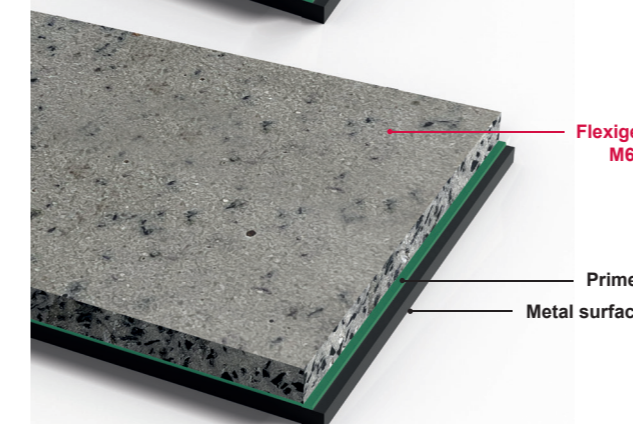

Flexigel M60

Flexigel M60 is a highly elastic and flexible IMO-approved underlay. It has great viscoelastic and impact-noise reduction properties. Generally used on all areas with specific acoustic requirements or where high elasticity flooring is preferred, such as sport areas and jogging tracks.


CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.20 kg/dm ³	■	■

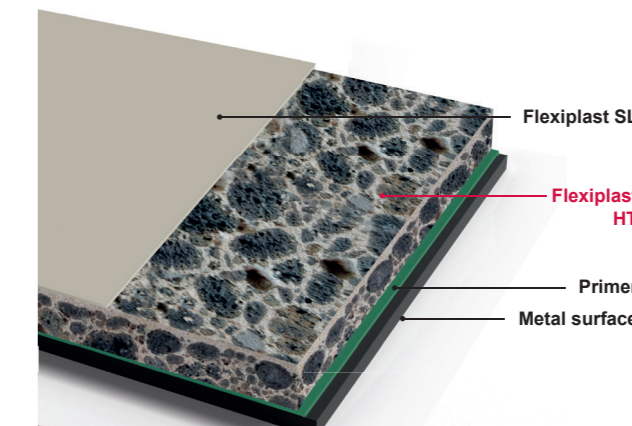

Flexiplast HT

Flexiplast HT is a hybrid epoxy flexible primary deck covering, perfect for high thickness, heavy-duty, indoor floors. With an average weight of 1 kg/dm³ and the ability to reach very high thicknesses up to 200 mm or more, it is the ideal underlay for most heavy-duty indoor areas in a ship, whenever high thicknesses are required.


CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.0 kg/dm ³	■	

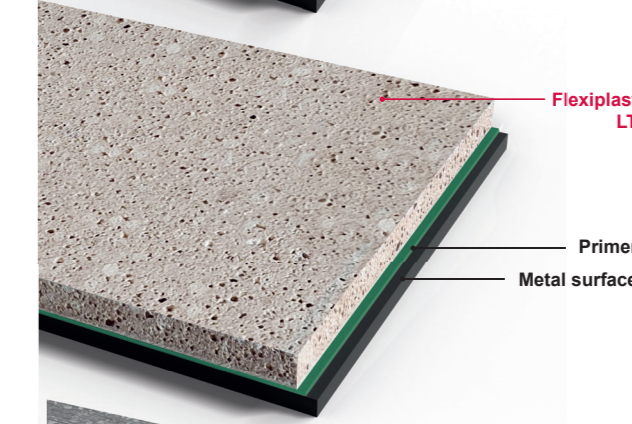

Flexiplast LT

Flexiplast LT is a hybrid epoxy flexible primary deck covering underlay with an average weight of 0.78 kg/dm³. It is the ideal underlay for the indoor application of most traditional flooring materials such as vinyl, carpets and other finishing or coating materials.


CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	0.78 kg/dm ³	■	

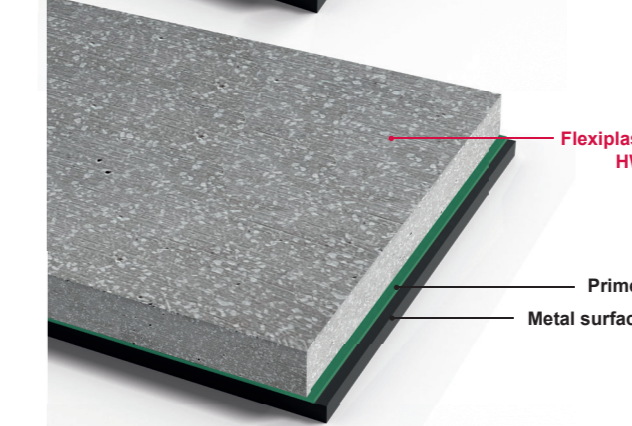

Flexiplast HW

Flexiplast HW is a hybrid epoxy flexible primary deck covering, highly self levelling, with a high 1.9 kg/dm³ specific weight. The underlay can be applied on steel, concrete, aluminum, epoxy or polyurethane resins after correct surface preparation and the application of *Flexiplast Primer*. Suitable for heavy-duty areas, especially the noisiest ones.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.90 kg/dm ³	■	

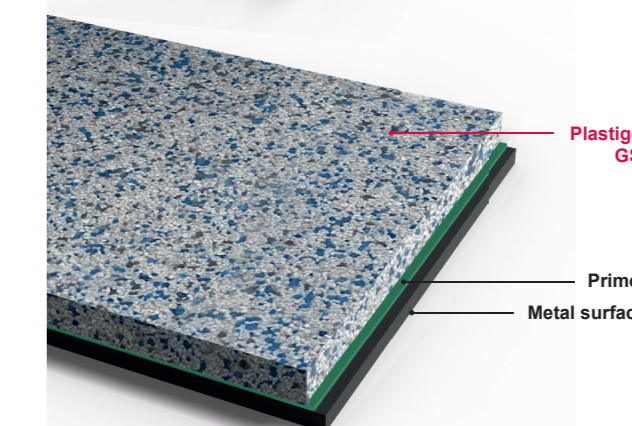

Plastigel GSI

Plastigel GSI is an epoxy underlay-top coat. It's a high thickness deck covering, and it can be applied without the need of a top coat thanks to its pleasant aesthetics. It's ideal for areas that need high mechanical resistance and flexibility, so it's very practical for flat surfaces and vertical structures (covings and skirtings). Thanks to its adaptability, **Plastigel GSI** is a great solution for wet units, accommodations or indoor spaces.

CERTIFIED	SPECIFIC WEIGHT	USE INDOOR	USE OUTDOOR
IMO-MED	1.75 kg/dm ³	■	